


The A35 anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way ties. Balanced, completely reversible design allows the A35 to be used to secure a wide variety of connections.

[UK-DoP-e07/0137](#), [ETA-07/0137](#)

FEATURES

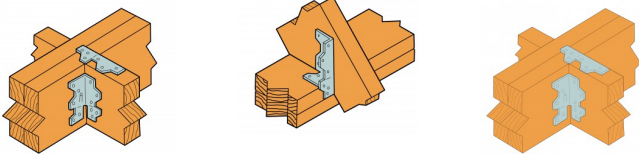

TECHNICAL DATA

A34 / A35

References	Fasteners		Safe Working Load [kN]	
	Qty	Specification	Long Term C16 Timber	
			Down (F1)	F2
A34	8	3.75 x 30mm	1.30	1.06

A34 Characteristic

References	Fasteners		Characteristic Capacity [kN]	
	Qty	Specification	C24 Timber	
			Down (F1)	F2
A34	8	3.75 x 30mm	0.97	0.63

