


CORRECT INSTALLATION

Type COM




Approvals

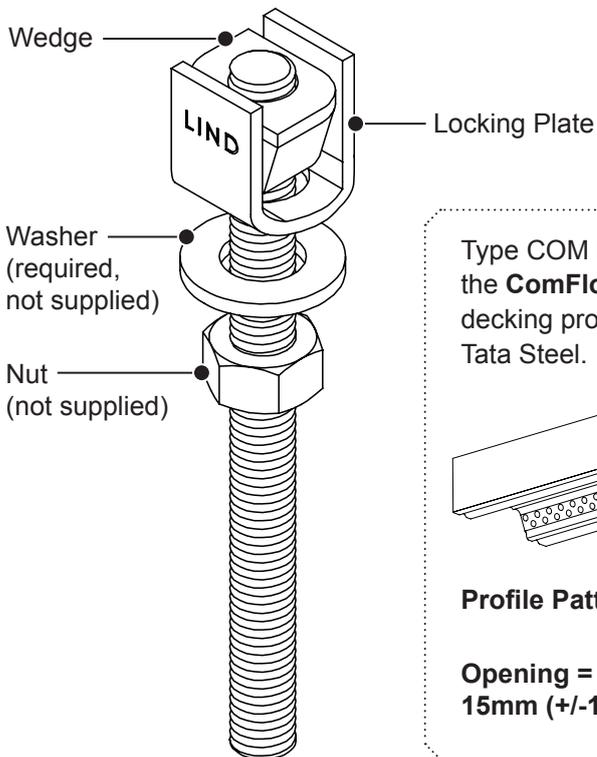


Fire Rated


Type COM is designed for use with the **ComFlor® 60** and **ComFlor® 80** decking profiles manufactured by Tata Steel.

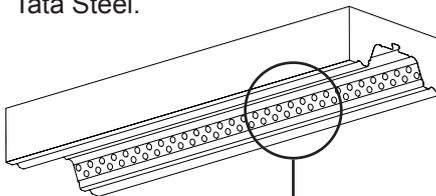

Profile Pattern =



Opening =
15mm (+/-1mm)



Product Code	Rod (min 4.6)	Tightening Torque
COM10*	M10	10 Nm

* A washer is required for COM10.

For safe working loads refer to www.Lindapter.com


lindapter®

Lindsay House, Brackenbeck Road, Bradford, West Yorkshire, BD7 2NF, England
Tel: +44 (0) 1274 521444 | Fax: +44 (0) 1274 521130 | www.Lindapter.com

CORRECT INSTALLATION

Type COM

Ref: COM_MAR22

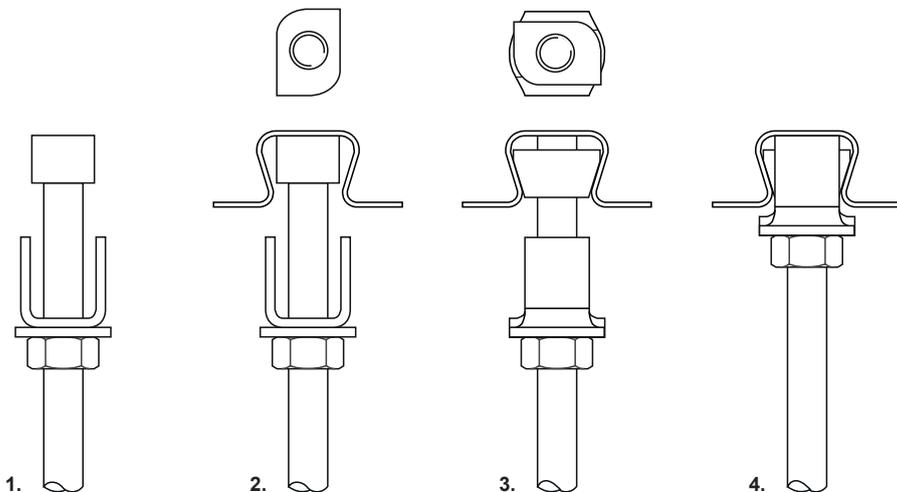

How to install

- 1) Pre-assemble the Locking Plate and wedge (flat surface facing up) onto the threaded rod.
- 2) Insert wedge into the re-entrant channel of the decking and rotate 90°.
- 3) Slide the plate up the threaded rod, over the wedge, to lock it in position into the channel.
- 4) Tighten a nut beneath the plate and washer to hold the assembly in position.

Notes

- **Install the decking fixings after the concrete has been poured and has reached full strength.**
- **If the decking profile is deformed / distorted, the fixing should not be installed. If in doubt, please contact Lindapter's Technical Support department for advice.**