

Technical data sheet

PISBMAXI Post Base with Stand Off

SIMPSON

Strong-Tie

The PISBMAXI is a heavy duty elevated post base to suit various sizes of timber and Glulam posts.

Features

Material

Material Grade

S235

Finish

Post hot dip galvanised.

Benefits

- The post base is made of 15mm thick plates welded to a Ø70mm tube.
- The column is fixed to an 8mm thick vertical plate with holes to suit Ø12mm dowels.


Applications

Suitable On

Timber / Glulam columns to solid foundations

Scope

The PISBMAXI is a heavy duty elevated post base to suit various sizes of timber and Glulam posts.

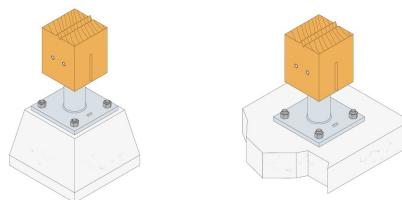


PISBMAXI

Post Base with Stand Off


Technical Data

Product Dimensions

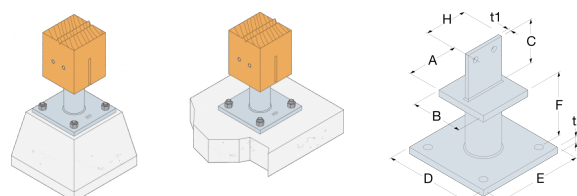

References	Product Dimensions [mm]										Top plate holes	Bottom plate holes	Box Quantity	Weight [kg]
	A	B	C	D	E	F	G	H	t ₁	t ₂	Ø13	Ø17		
PISBMAXI-G-B	120	120	105	200	200	148	70	90	8	15	2	4	-	8.1

Simplified Characteristic Capacities - Timber to Concrete

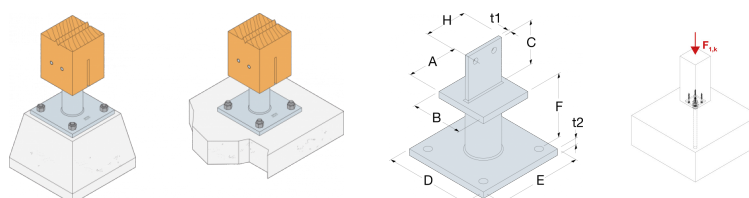

References	Number of Fasteners				Simplified characteristic capacities - Timber C24 [kN]									
	On post		On concrete		R _{1,k} **	R _{2,k}			R _{3,k} **			R _{4,k}		
	Qty	Type	Qty	Type		Dowel length [mm]			Dowel length [mm]			Dowel length [mm]		
						120	140	160	120	140	160	120	140	160
PISBMAXIG-B	2	Ø12	4	Ø16*	272.2	34.5	38.5	42.1	22.5	20.1	20.1	7.7	9.9	12.3

* Refer to the Simpson Strong-Tie anchor product range for suitable anchors. Typical anchor solutions are SET-XP and AT-HP, depending on the concrete type, spacing and edge distances.

** The published characteristic capacity is based on medium term load duration and service class 3 according to EC5 (EN 1995). For other load duration and service class, please refer to the ETA to get more accurate capacities




PISBMAXI

Post Base with Stand Off

Installation

Installation

The posts must have a slot to suit the vertical metal plate and 2 holes for the Ø12mm dowels.



Concrete pad size WxLxD as advised in notes above

