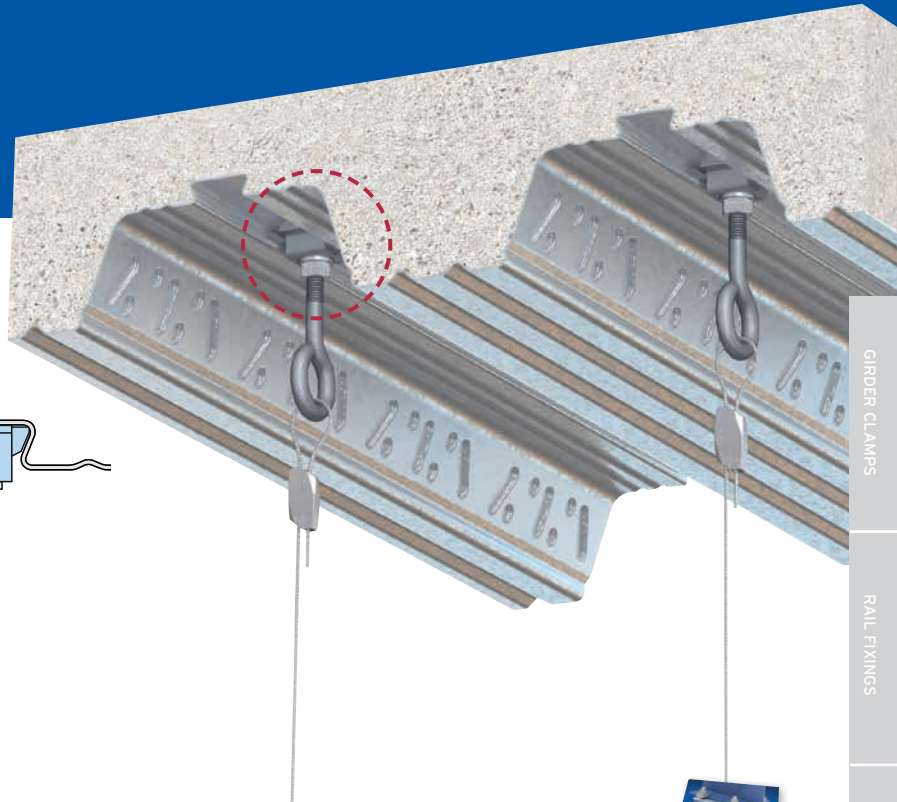



## Type AMD

Suitable for AMDECK® 60 and AMDECK® 80 decking profiles manufactured by AMDECK®.



For Characteristic Resistances when designing a connection to Eurocode 3, refer to DoP No.018 (CE) or DoC No.118 (UKCA) on Lindapter's website. Alternatively, request a DoP or DoC brochure.



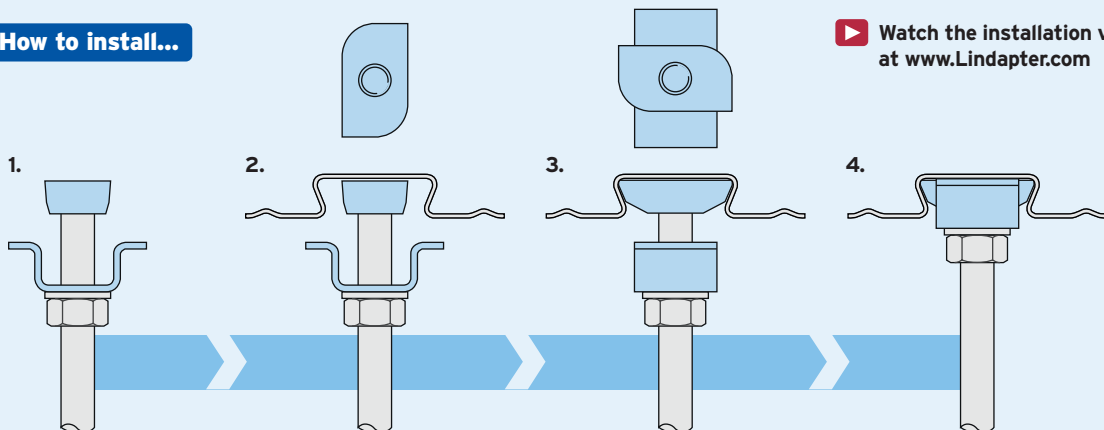
**Locking Plate:** Pre-galvanised strip. **Wedge:** Malleable iron, bright zinc plated.

| Product Code | Rod min 4.6 | Safe Working Load (FOS 3:1) |                         |
|--------------|-------------|-----------------------------|-------------------------|
|              |             | Tensile / 1 Rod<br>kN       | Tightening Torque<br>Nm |
| AMD06        | M6          | 1.0                         | 10                      |
| AMD08        | M8          | 1.0                         | 10                      |
| AMD10        | M10         | 1.0                         | 10                      |



### How to install...

▶ Watch the installation video at [www.Lindapter.com](http://www.Lindapter.com)



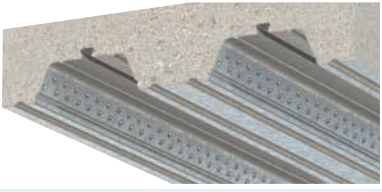


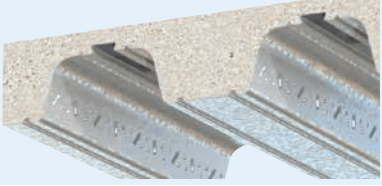



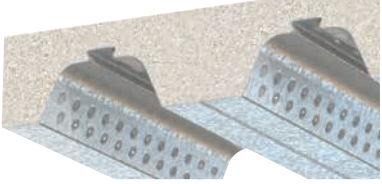

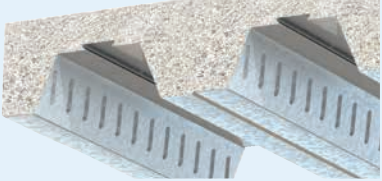


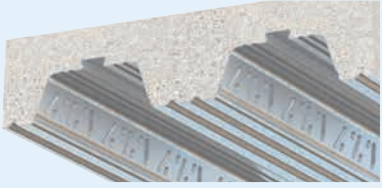
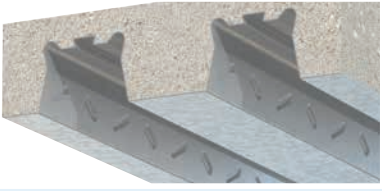


- 1) Pre-assemble the Locking Plate and wedge (flat surface facing up) onto the threaded rod.
- 2) Insert wedge into the re-entrant channel of the decking, rotate 90°.
- 3) Slide plate up the threaded rod, over the wedge, to lock it in position into the channel.
- 4) To hold the assembly in position, tighten a nut beneath the plate and washer to the tightening torque specified in the table above.

- ▶ Install the decking fixings after the concrete has been poured and has reached full strength.
- ▶ If the decking profile is deformed or distorted, do not install the fixing. If in doubt, contact the Technical Support team for advice.
- ▶ Although the Type AMD is similar in appearance to Type AW (p. 74), it should NOT be used in profiles manufactured by Richard Lees.

## Compatible Profiles

Lindapter has developed an extensive range of CE Marked decking fixings to ensure optimum compatibility with all major decking profiles.

| Lindapter Decking Fixing                                                                                                                                                                                           | Compatible Composite Decking Profile(s)                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Type COM</b><br>page 70<br>                   | <b>Tata Steel</b><br>ComFlor® 60, 80 and 95<br>         |
| <b>Type TR60</b><br>page 71<br>                  | <b>SMD®</b><br>TR60+™ and TR80+™<br>                    |
| <b>Type MF</b><br>page 72<br>                   | <b>CMF®</b><br>MetFloor® 60 and MetFloor® 80<br>       |
| <b>Type MW2 Multiwedge 2</b><br>page 73<br>  | <b>Kingspan®</b><br>Multideck MD60 and MD80<br>   |
| <b>Type AW Alphawedge</b><br>page 74<br>     | <b>Richard Lees Decking</b><br>Ribdeck E60<br>    |
| <b>Type AMD</b><br>page 75<br>                                                                                                  | <b>AMDECK®</b><br>AMDECK® 60 and AMDECK® 80<br>   |
| <b>Type SM</b><br>page 76<br>                | <b>Sigmat</b><br>SigDeck 100<br>                  |
| <b>Type VN</b><br>page 77<br>                | <b>Fits several profiles including:</b><br>AMDECK® 54, R51+™, ComFlor® 51+, Holorib, Superib, Multideck MD50 and MetFloor® 55.<br>                                                                                       |